



18 LED
40 x 2,5

con
interruttore



21 LED
Ø 15,5



Catalogo Plafoniere Faretti da lavoro



BASE PIANA CON INTERR.

018.005 COBO 12v / 24v
120 x 36 x 27mm



BASE PIANA CON INTERR.

018.006 COBO 12v / 24v
165 x 38 x 28mm



BASE PIANA CON INTERR.

018.004 COBO 12v / 24v
200 x 70 x 43mm



BASE A INCASSO

018.007 COBO 12v 11w
018.008 COBO 24v 11w
330 x 125mm



BASE PIANA CON INTERR.

018.012 COBO 12v 9w
018.013 COBO 24v 9w
290 x 168mm




BASE PIANA CON INTERR.

018.014 COBO 12v 11w
400 x 76mm



BASE PIANA

018.020 COBO 12v
018.021 COBO 24v

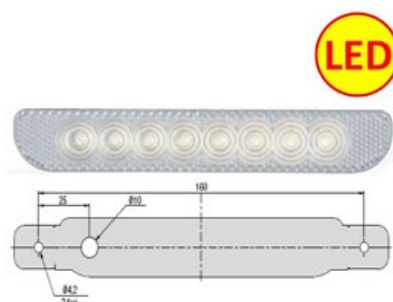

BASE DA INCASSO

018.048 LUCIDITY 12 / 24V
465 x 150 mm



BASE PIANA

018.029 P.PLAST 12v
018.030 P.PLAST 24v
Ø 140 18 LED



BASE PIANA INCLINATA

018.047 LUCIDITY 12 / 24V
286,6 x 41,6





BASE PIANA

018.035 Lucidity 12v / 24v

LED



BASE PIANA

018.036 Lucidity 12v / 24v

LED



ON/OFF
TOUCH
Ø 7,5

BASE PIANA

018.037 Lucidity 12v / 24v

LED



Ø 15,5

BASE PIANA

018.038 Lucidity 12v / 24v

LED



21 LED
Ø 15,5

ON/OFF
TOUCH

BASE PIANA

018.039 Lucidity 12v / 24v

LED



39 LED
Ø 17,7

BASE PIANA

018.040 Lucidity 12v / 24v

LED



39 LED
Ø 17,7

ON/OFF
TOUCH

BASE PIANA

018.041 Lucidity 12v / 24v

LED



9 LED
24,5 x 2,5

BASE PIANA

018.042 Lucidity 12v / 24v

LED



9 LED
24,5 x 2,5

con
interruttore

BASE PIANA

018.043 Lucidity 12v / 24v

LED



18 LED
40 x 2,5

BASE PIANA 18 led

018.044 Lucidity 12v / 24v

LED



18 LED
40 x 2,5

con
interruttore

BASE PIANA 27 led

018.045 Lucidity 12v / 24v

LED



27 LED
55,5 x 2,5

BASE PIANA 27 led

018.046 Lucidity 12v / 24v

LED



27 LED
55,5 x 2,5

con
interruttore



CON INTERR. E MANIGLIA

009.602 FER FARO COMPLETO
Ø 145 mm



CON INTERR. E MANIGLIA

009.603 FER FARO COMPLETO
170 x 90 mm



CON INTERR. E MANIGLIA

009.610 HELLA FARO COMPLETO
Ø 147 mm



SENZA INTERR. E MANIGLIA

009.655 HELLA FARO COMPLETO
155 x 90 mm



CON INTERR. E MANIGLIA

009.633 AJBA FARO COMPLETO
160 x 100 mm **Doppia Parabola**





SENZA INTERR. E MANIGLIA

009.615 COBO FARO COMPLETO
Ø 105 mm



SENZA INTERR. E MANIGLIA

009.572 COBO FARO COMPLETO
Ø 94 mm



CON INTERR. E MANIGLIA

009.607 COBO FARO COMPLETO
Ø 140 mm



SENZA INTERR. E MANIGLIA

009.601 COBO FARO COMPLETO



SENZA INTERR. E MANIGLIA

009.574 COBO FARO COMPLETO



SENZA INTERR. E MANIGLIA

009.605 COBO FARO COMPLETO
158 x 86 mm



SENZA INT. Con. MANIGLIA

009.604 COBO FARO COMPLETO
178 x 86 mm



SENZA INTERR. E MANIGLIA

009.630 COBO FARO COMPLETO
110 x 100 mm



SENZA INTERR. E MANIGLIA

009.638 COBO FARO COMPLETO
Ø 105 mm



CON INTERR. E MANIGLIA


009.611 COBO FARO COMPLETO
Ø 105 mm





009.200

1 Led 10/30v 10W 6000k - **720 Lumen**



YY5010B Profondita'

- . LED Power: 10W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 1pcs*10w high intensity Epsitar LEDs
- . Current draw 1A@ 12V, 0.5@24V
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Size: 57mm*57mm*65mm
- . Certificates:CE、 RoHs、 IP67

009.201

1 Led 10/30v 10W 6000k - **720 Lumen**




YY5010B Larghezza

- . LED Power: 10W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 1pcs*10w high intensity Epsitar LEDs
- . Current draw 1A@ 12V, 0.5@24V
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Size: 57mm*57mm*65mm
- . Certificates:CE、 RoHs、 IP67

009.620

4 Led 10/30v 10W 6000k - **800 Lumen**

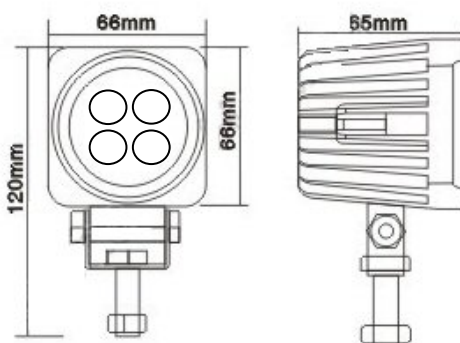

YY5012 Larghezza

- . LED Power: 10W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 4pcs*3w high intensity Epsitar LEDs
- . Current draw 1A @ 12V,0.5A@24V
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:Toughened glass
- . Mounting Bracket: Stainless Steel
- . Spot beam pattern (20 degree)
- . 30000 hours above life time
- . Size: 66mm*66mm*65mm
- . Certificates:CE、 RoHs、 IP67





009.579

5 Led 10/30V 15W 6000k -1000 Lumen

YY5015 Larghezza

LED

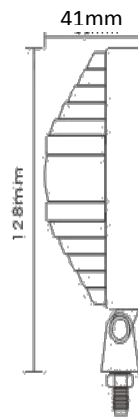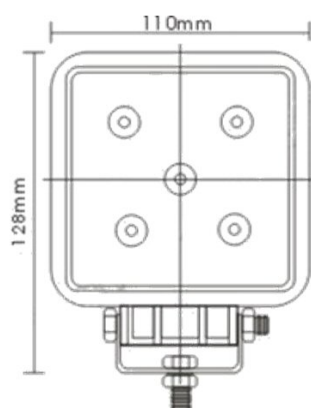

- . LED Power: 15W
- . Operating Voltage: 10-30V DC
- . 5pcs*3w high intensity Epsitar LEDs

1A a 12V - 0.55A a 24V



- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal Beam: Narrow flood beam pattern(30 degree)
- . 30000 hours above life time
- . Size: 128mm*110mm*41mm
- . Certificates:CE、 RoHs、 IP67

009.621

6 Led 10/30v 18W 6000k - 1200 Lumen

YY5018 Larghezza

LED

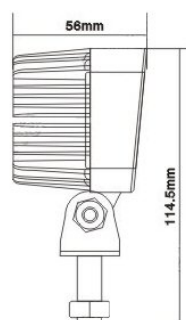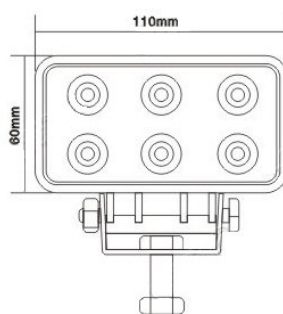



- . LED Power: 18W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 6pcs*3w high intensity Epsitar LEDs
- . Current draw 1.4A @ 12V,0.75A@24V
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Size: 110mm*60mm*56mm
- . Certificates:CE、 RoHs、 IP67

009.622

9 Led 10/30v 27W 6000k - 1800 Lumen

YY5027 Larghezza

LED

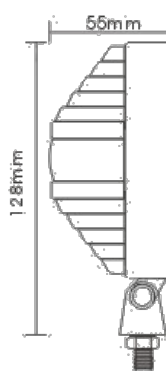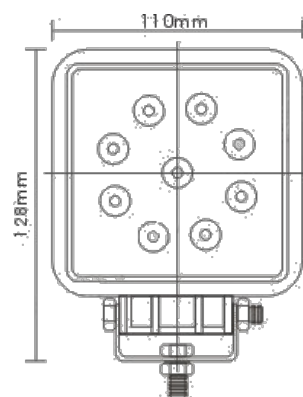

- . LED Power: 27W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 9pcs*3w high intensity Epsitar LEDs
- . Current draw 1.7A @ 13V,0.9A@24V
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal Beam: Narrow flood beam pattern(30 degree)
- . 30000 hours above life time
- . Size: 128mm*110mm*55mm
- . Certificates:CE、 RoHs、 IP67




009.624

16 Led 10/30v 48W 6000k - **1800 Lumen**

LED

NEW

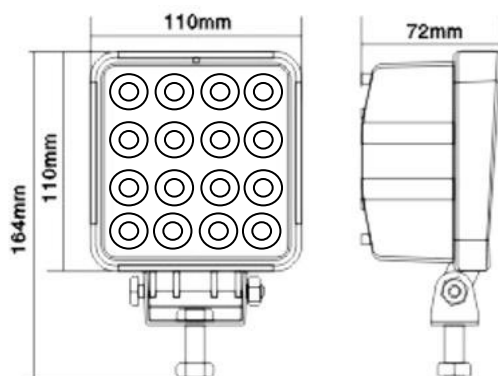


YY5048 Larghezza

- 1) Potere: 48W
- 2) Tensione: 10-30V DC
- 3) Tasso impermeabile: IP 67
- 4) 16pcs * 3W Epistar LED ad alta intensità.
- 5) Lumin: 3300lum
- 6) Assorbimento di corrente 1.7A @ 13V, 0.9A @ 24V
- 7) Opzionale Colore: Nero,
- 8) Temp di colore: **6000K**
- 9) Custodia: alluminio pressofuso
- 10) Obiettivo: PMMA
- 11) Larghezza: Spot / Flood Modello del fascio
- 12) Tempo Lifte: 30000 ore sopra

009.578

9 Led 10/30v 27W 6000k - **1800 Lumen**

LED

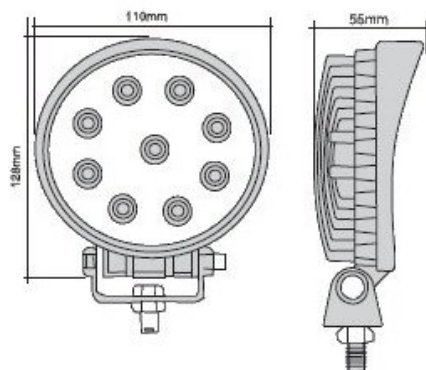

YY5027B Larghezza

- 1) Potere: 27W
- 2) Tensione: 10-30V DC
- 3) Tasso impermeabile: IP 67
- 4) 9pcs * 3W Epistar LED ad alta intensità.
- 5) Lumin: 1800lum
- 6) Assorbimento di corrente 1.7A @ 13V, 0.9A @ 24V
- 7) Opzionale Colore: Nero,
- 8) Temp di colore: **6000K**
- 9) Custodia: alluminio pressofuso
- 10) Obiettivo: PMMA
- 11) Larghezza: Spot / Flood Modello del fascio
- 12) Tempo Lifte: 30000 ore sopra
- 13) Dimensione: 4,5 pollici Rotondo

009.623

9 Led 10/30v 27W 6000k - **1800 Lumen**

LED



YY5027T Larghezza


- 1) Potere: 27W
- 2) Tensione: 10-30V DC
- 3) Tasso impermeabile: IP 67
- 4) 9pcs * 3W Epistar LED ad alta intensità.
- 5) Lumin: 1800lum
- 6) Assorbimento di corrente 1.7A @ 13V, 0.9A @ 24V
- 7) Opzionale Colore: Nero,
- 8) Temp di colore: **6000K**
- 9) Custodia: alluminio pressofuso
- 10) Obiettivo: PMMA
- 11) Larghezza: Spot / Flood Modello del fascio
- 12) Tempo Lifte: 30000 ore sopra
- 13) Dimensione: 4,5 pollici Rotondo



009.204

8 Led 10/30v 80W 6000k - **6500 Lumen**

LED

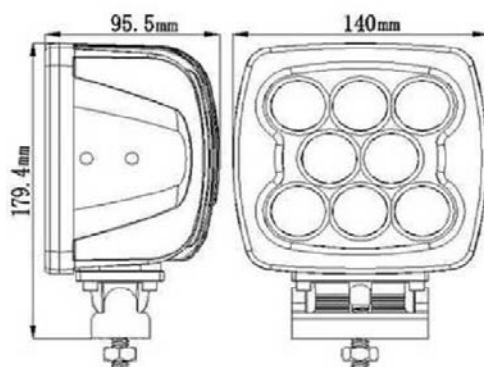

YY8880 Profondita'


- . LED Power: 80W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 8pcs*10w high intensity Epsitar LEDs
- . Current draw 6.4A@ 12V,3.2A@24V
- . Optional Color: Black,White
- . Color Temperature: **6000K**
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHS、 IP67

140mm X 95,5mm X 179,4mm

009.205

8 Led 10/30v 80W 6000k - **6500 Lumen**

LED

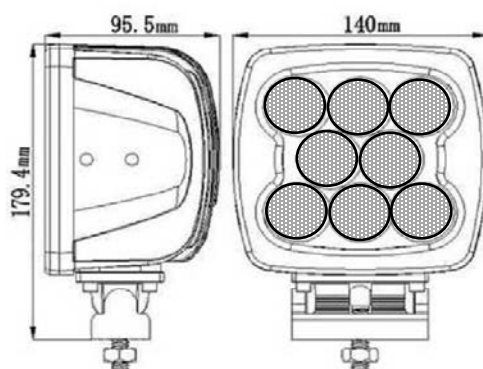

YY8880 Larghezza


- . LED Power: 80W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 8pcs*10w high intensity Epsitar LEDs
- . Current draw 6.4A@ 12V,3.2A@24V
- . Optional Color: Black,White
- . Color Temperature: **6000K**
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHS、 IP67

140mm X 95,5mm X 179,4mm

009.206

8 Led 10/30v 80W 6000k - **6500 Lumen**

LED

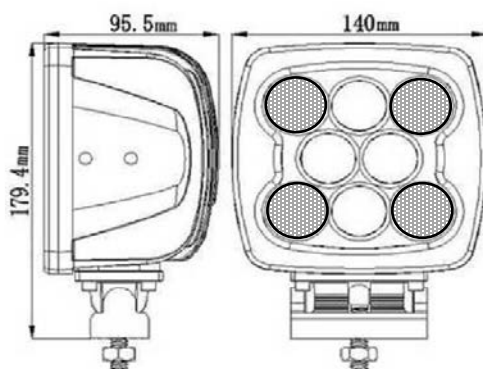

YY8880 Profondita' / Larghezza

- . LED Power: 80W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 8pcs*10w high intensity Epsitar LEDs
- . Current draw 6.4A@ 12V,3.2A@24V
- . Optional Color: Black,White
- . Color Temperature: **6000K**
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHS、 IP67

140mm X 95,5mm X 179,4mm



009.221

9 Led 10/60V 45W 6000k - 3600 Lumen

LED

NEW





CM5045S Larghezza

- . LED Power: 45W
- . Operating Voltage: 10-60V DC
- . Waterproof rate: IP 67
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal Beam: Narrow flood beam pattern(30 degree)
- . 30000 hours above life time
- . Size: 128mm*110mm*55mm
- . Certificates:CE、 RoHs、 IP67

009.207

6 Led 10/36v 30W 6000k - 2250 Lumen

LED

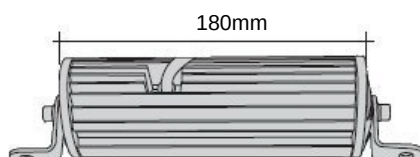

YY5330 Larghezza

YY5330 Profondita'



- . LED Power: 30W
- . Operating Voltage: 10-36V DC
- . Waterproof rate: IP 67
- . 6pcs*5w high intensity Epsitar LEDs
- . Current draw
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHs、 IP67

180mm X 65mm X 45mm

009.208

12 Led 10/36v 60W 6000k - 4500

LED

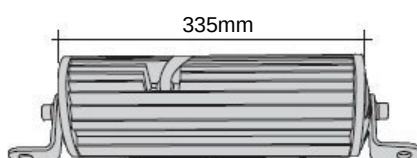

YY5360 Larghezza

- . LED Power: 60W
- . Operating Voltage: 10-36V DC
- . Waterproof rate: IP 67
- . 12pcs*5w high intensity Epsitar LEDs
- . Current draw 4A@ 12V, 2A@24V
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHs、 IP67

335mm X 65mm X 45mm



009.209

24 Led 10/36v 120W 6000k - 9000 Lumen

LED



YY53120 Larghezza + Profondita'

- . LED Power: 120W
- . Operating Voltage: 10-36V DC
- . Waterproof rate: IP 67
- . 24pcs*5w high intensity Epsitar LEDs
- . Current draw 4A@ 12V, 2A@24V
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHs、 IP67

645mm X 65mm X 45mm

009.210

36 Led 10/36v 180W 6000k - 10.800 Lumen

LED



YY53180 Larghezza + Profondita'

- . LED Power: 180W
- . Operating Voltage: 10-36V DC
- . Waterproof rate: IP 67
- . 36pcs*5w high intensity Epsitar LEDs
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHs、 IP67

972mm X 65mm X 45mm

009.211

42 Led 10/36v 210W 6000k - 12.600 Lumen

LED



YY53210 Larghezza + Profondita'


- . LED Power: 210W
- . Operating Voltage: 10-36V DC
- . Waterproof rate: IP 67
- . 42pcs*5w high intensity Epsitar LEDs
- . Optional Color: Black,White
- . Color Temperature: 6000K
- . Material:Diecast aluminum housing
- . Lens material:PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates:CE、 RoHs、 IP67

1092mm X 65mm X 45mm



009.202

6 Led 10/30v 18W 6000k - **1260 Lumen**

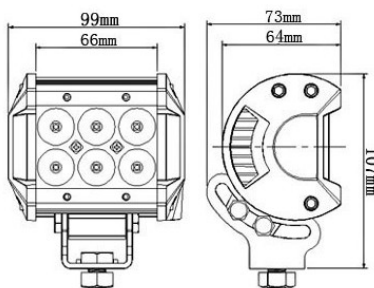


YY5918 Larghezza

- . LED Power: 18W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 6pcs*3w high intensity Epsitar LEDs
- . Current draw 1.4A@ 12V, 0.7A@24V
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material: Diecast aluminum housing
- . Lens material: PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates: CE, RoHs, IP67


99mm X 73mm X 107mm

009.203

12 Led 10/30v 36W 6000k - **2520 Lumen**

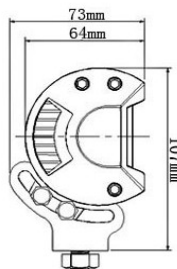

167mm



YY5936 Larghezza

- . LED Power: 36W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 1pcs*10w high intensity Epsitar LEDs
- . Current draw 2.8A@ 12V, 1.4A@24V
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material: Diecast aluminum housing
- . Lens material: PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates: CE, RoHs, IP67



167mm X 73mm X 107mm

009.212

42 Led 10/30v 126W 6000k - **8820 Lumen**



505mm

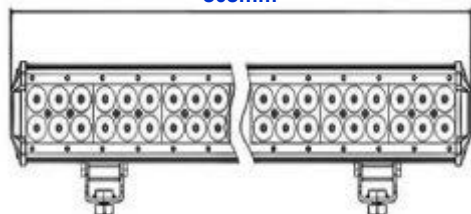

YY59126 Larghezza + Profondita'

- . LED Power: 126W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 1pcs*10w high intensity Epsitar LED
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material: Diecast aluminum housing
- . Lens material: PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates: CE, RoHs, IP67

505mm X 73mm X 107mm



009.213

78 Led 10/30v 234W 6000k – **16.380 Lumen**

LED



YY59234 Larghezza + Profondita'

- . LED Power: 234W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 1pcs*3w high intensity Epsitar LEDs
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material: Diecast aluminum housing
- . Lens material: PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates: CE, RoHs, IP67

914mm X 73mm X 107mm

009.214

96 Led 10/30v 288W 6000k – **20.160 Lumen**

LED



YY59288 Larghezza + Profondita'

- . LED Power: 288W
- . Operating Voltage: 10-30V DC
- . Waterproof rate: IP 67
- . 1pcs*3w high intensity Epsitar LEDs
- . Optional Color: Black,
- . Color Temperature: 6000K
- . Material: Diecast aluminum housing
- . Lens material: PC
- . Mounting Bracket: Stainless Steel
- . Opitonal (60 degree (30 degree)
- . 30000 hours above life time
- . Certificates: CE, RoHs, IP67

1089mm X 73mm X 107mm

009.217

9 Led 10/30v 6000k – **2.800 Lumen**

LED







009.580

9 Led 12/36v 20W

1800 Lumen

Profondita'

LED

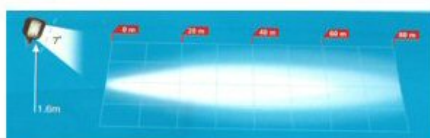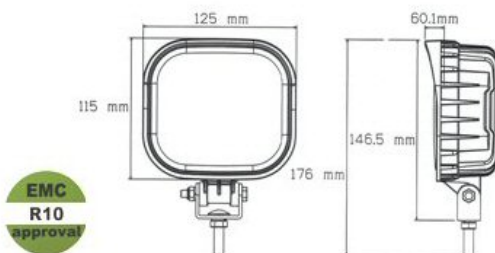

Lumen 1800
13,5v - 1,5A
28v - 0,73A

IP 67



009.581

9 Led 12/36v 20W

1800 Lumen

Larghezza

LED

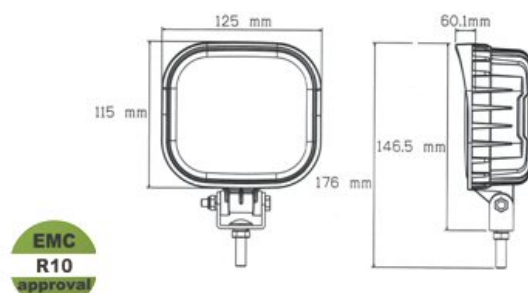

Lumen 1800
13,5v - 1,5A
28v - 0,73A

IP 67



009.582

8 Led 12/36v 19W

1800 Lumen

Larghezza

LED

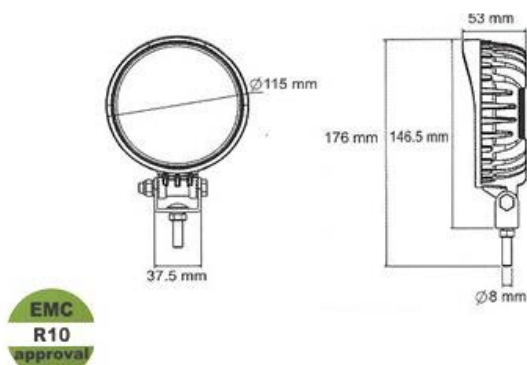

Lumen 1600
13,5v - 1,38A
28v - 0,65A

IP 67



009.585

3 Led 12/36v 9W

600 Lumen

Larghezza

LED



Lumen 600
13,5v - 0,68A
28v - 0,33A

IP 67

009.586

1 Led 12/36v 10W

800 Lumen

Larghezza

LED



Lumen 800
12,8v - 0,91A
28v - 0,42A
36v - 0,31A

IP 67

009.570

8 Led 12/80v 70W

4000 Lumen

Larghezza

LED



Lumen 1600
13,5v - 1,38A
28v - 0,65A

IP 67